



BASELITE – CH-DB-SL – INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	X	/
	A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE:	DB1	41	E16	CB ½"	43	45W	3K	LDM120	PR3	-	44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



DB1/49/E16/CB3/4"/49/100INC/FR3

A - SHADES

CH SERIES

CH1 - 100WINC (MAX), (3" GLASS), (3" GUARD)

CH2 - 200WINC (MAX), (4" GLASS), (4" GUARD)

DB SERIES

DB1 - 100WINC (MAX), (3" GLASS), (3" GUARD)

DB2 - 200WINC (MAX), (4" GLASS), (4" GUARD)

SL SERIES

SL12 - 100WINC (MAX), (3" GLASS), (3" GUARD)

SL18 - 200WINC (MAX), (4" GLASS), (4" GUARD)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)

(SEE WEBSITE FOR SWATCH COLORS)

20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61,
62, 63, 70, 71, 72, 73

C - MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E3, E4, B1, E16, E17

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
E10, E11, E12, E13, B15, B15S,
E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND
FABRICATE A CUSTOM ARM EXTENSION TO
MEET YOUR NEEDS).

CORD MOUNT

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB,
TLW, TLB, TLW, RCB, RCW, RCHB, RCHW,
FHB, FHW, CBLC, CWHC, CHB, CHW

STEM MOUNT

DP24, ST6, ST12, ST18, ST24, ST36, ST48,
STXX

D - MOUNTING ADD-ONS

INC ADD-ONS

CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2",
SLC3/4" STC1/2"

UNIVERSAL ADD-ONS

FH ½", FH ¾", LGSWL

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

INCANDESCENT (INC)

100W, 200W

G - LED COLOR TEMP

NOT AVAILABLE

H - ELECTRICAL OPTION

NOT AVAILABLE

I - GLASS OPTIONS

3" GLASS (AVAILABLE FOR CH1, DB1 & SL12)

CL3, CLT3, BL3, RE3, GR3,
AH3, FR3, FRT3, PR3

4" GLASS (AVAILABLE FOR CH2, DB2 & SL18)

CL4, CLT4, BL4, RE4, GR4,
AH4, FR4, FRT4, PR4

J - ACCESSORIES

3" GUARDS (AVAILABLE FOR CH1, DB1 & SL12)

CG1, WG1

4" GUARDS (AVAILABLE FOR CH2, DB2 & SL18)

CG2, WG2

K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
OPTIONS.

NOTES

(1). FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93
AND 98 ARE APPLIED BY HAND. THESE
FINISHES WILL VARY IN CONSISTENCY.

(2). FINISH OPTIONS 38, 39, 40, 49, 54, 57,
58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88,
92, 93, 98 ONLY AVAILABLE INSIDE AND OUT
OF FIXTURE. OTHER FINISHES ARE WHITE
INSIDE.

(3). FINISH OPTIONS FOR SHADES ≤ 10" IN
DIAMETER ARE THE SAME INSIDE AND OUT
OF FIXTURE. SHADES > 10" IN DIAMETER ARE
WHITE ON THE INSIDE.

(4). FINISH OPTIONS 61, 62, 70, 71, 72, 73
ARE FINISHED WITH A SUPERCHROME ON
THE INSIDE FOR ALL LED LIGHT SOURCE
OPTIONS.

(5). COLOR CORDS ARE NOT APPLICABLE FOR
LED OPTIONS.

*ALL ARMS COME WITH A CAST BACKPLATE
(CB1/2", CB3/4", LWTM, CFWTM, ECT.).


*ACCORDING TO THE LIGHT SOURCE THE
BACKPLATE MAY VARY IN SIZE. (EXAMPLE:
LED LIGHT SOURCE WILL HAVE A DEEPER
BACKPLATE TO HOUSE THE DRIVER.).

*ALL FIXTURES MOUNT TO A 4-O JUNCTION
BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.


*CORD AND CANOPY COME IN THE SAME
COLOR.

*RATED FOR WET LOCATION.




CH1 H - 9.625" W - 12"

CH2 H - 12" W - 14"



DB1 H - 9.5" W - 10"

DB2 H - 12" W - 12"



SL12 H - 11.25" W - 12"

SL18 H - 11.25" W - 18"



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED



E1 8.5"(H) 18.5"(W)



E3 16"(H) 24.75"(W)



E4 14.5"(H) 22.25"(W)



B1 4"(H) 12"(W)




E16 4.75"(H) 8.5"(W)



E17 4.75"(H) 9.5"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

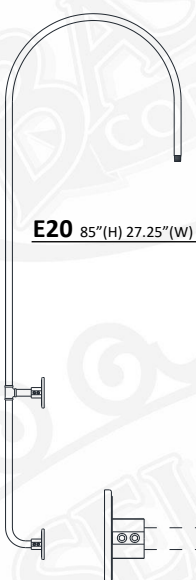

E20 85"(H) 27.25"(W)



E3A 16.375"(H) 26.25"(W)




E4A 14.5"(H) 23.75"(W)




E5 15"(H) 38.5"(W)



E6 9"(H) 23.75"(W)



E9 41.75"(H) 28.125"(W)




E12 6"(H) 39"(W)




E7 9"(H) 49.75"(W)




E8 12"(H) 31.25"(W)

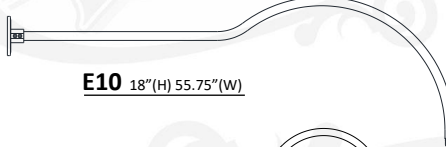


E10 18"(H) 55.75"(W)




B15 7.5"(H) 24.5"(W)



E11 19"(H) 36.5"(W)



E25 32.625"(H) 28.5"(W)



E13 30.625"(H) 26.75"(W)



E14 TBD"(H) TBD"(W)



B15S 7.5"(H) 19.5"(W)




E21 12.5"(H) 28.5"(W)



E19 10.625"(H) 11.5"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

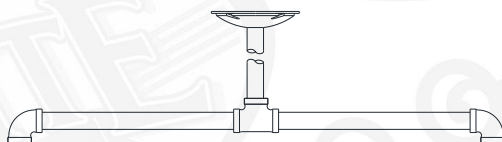

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST




C - MOUNTING OPTIONS (CONTINUED)

INCANDESCENT CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W) *CORD AND CANOPY COME IN THE SAME COLOR.



BLC 8' BLACK CORD
WHC 8' WHITE CORD



TCB 8' BLACK CORD, CABLE, and LOOP
TCW 8' WHITE CORD, CABLE, and LOOP



TCHB 8' BLACK CORD, 3' CHAIN, and LOOP
TCHW 8' WHITE CORD, 3' CHAIN, and LOOP




TLB 8' BLACK TELEPHONE CORD AND CABLE
TLW 8' WHITE TELEPHONE CORD AND CABLE
* Not available H.I.D.



RCB 8' BLACK CORD, CABLE, and LOOP
RCW 8' WHITE CORD, CABLE, and LOOP



RCHB 8' BLACK CORD, 3' CHAIN, and LOOP
RCHW 8' WHITE CORD, 3' CHAIN, and LOOP



FHB 8' BLACK CORD WITH FLAT HUB
FHW 8' WHITE CORD WITH FLAT HUB




CBLC 8' BLACK CORD and CABLE
CWLC 8' WHITE CORD and CABLE




CHB 8' BLACK CORD, 3' CHAIN, and LOOP
CHW 8' WHITE CORD, 3' CHAIN, and LOOP
* Loop may vary due to shade style


INCANDESCENT ARM ADD-ONS




CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT
CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT



CBC 1/2" 1/2" BACKPLATE COVER
CBC 3/4" 3/4" BACKPLATE COVER
* Includes slip ring to hold 1/2" or 3/4" arm extension in place



SLC 1/2" SLOPE CEILING CANOPY 1/2"
SLC 3/4" SLOPE CEILING CANOPY 3/4"
*(Slopes To 20 Degrees)




STC 1/2" 1/2" STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -1/2-LWTM, TRB 3/4, LGSWL-1-1-1-1-1-
A B C D E F G H I J K



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26					
INC 100W - CH1, DB1, SL12 INC 200W - CH2, DB2, SL18			*IMPORTANT – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / INC100W /		
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A
200WINC	200W	PER BULB SPECS	>90	120-277 VAC	N/A

I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.

*3" GLASS AVAILABLE FOR CH1, DB1 & SL12

*4" GLASS AVAILABLE FOR CH2, DB2 & SL18



CL3 3" CLEAR GLASS
CL4 4" CLEAR GLASS
CLT3 3" CLEAR TEMPERED
CLT4 4" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS
PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS
RE4 4" RED GLASS



BL3 3" BLUE GLASS
BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS
FR4 4" FROSTED GLASS
FRT3 3" FROSTED TEMPERED
FRT4 4" FROSTED TEMPERED




AH3 3" AMBER HYDE GLASS
AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS
GR4 4" GREEN GLASS

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"


GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W




J – ACCESSORIES

* 3" GUARDS AVAILABLE FOR CH1, DB1 & SL12


*4" GUARDS AVAILABLE FOR CH2, DB2 & SL18




WG1 WIRE GUARD



WG2 WIRE GUARD



CG1 CAST GUARD



CG2 CAST GUARD