

KT-LEDXXA19-O-8CSF-XX /G4

GENERAL PURPOSE LED LAMP

DESCRIPTION

A19 Lamp | E26 Medium Base | Color Select | 15,000hr Lifetime

APPLICATIONS

- Table, desk, and floor lamps
- Wall sconces
- Surface-mount ceiling fixtures
- General lighting
- Pendant lights



Enclosed
 Fixture Rated

RoHS
 Compliant



2 YEAR
 WARRANTY

PRODUCT FEATURES

- 80%+ energy savings and less heat generation vs legacy equivalents
- 15,000 hr lifetime means fewer replacements and lower maintenance costs
- Smooth diffused lens for comfortable, glare free performance
- Durable plastic housing for lower risk of breakage
- ANSI compliant construction ensures fit for intended applications
- UL Certified
- Suitable for use in enclosed fixtures
- Suitable for dry and damp locations
- 220° beam angle
- Operating temperature range: 4°F/-20°C to 104°F/40°C
- Complies with FCC Part 15

PERFORMANCE SPECIFICATIONS OVERVIEW

Catalog Number	Rated Lamp Wattage	Preset CCT	Lumens	Efficacy	Input Voltage	Dimming	CRI	Base Type	Power Factor	Legacy Equivalent Wattage
KT-LED14A19-O-8CS /G4	14W	2700K	1,600	114 lm/W	120V	Yes	>80	E26	0.7	100W
KT-LED14A19-O-8CSF-ND /G4	14W	2700K	1,600	114 lm/W		No			0.9	100W
KT-LED12A19-O-8CSF /G4	12W	2700K	1,100	92 lm/W		Yes			0.7	75W
KT-LED9A19-O-8CSF /G4	9W	2700K	800	89 lm/W		Yes			0.7	60W
KT-LED9A19-O-8CSF-ND /G4	9W	2700K	800	89 lm/W		No			0.5	60W
KT-LED5.5A19-O-8CSF /G4	5.5W	2700K	450	82 lm/W		Yes			0.7	40W
KT-LED5.5A19-O-8CSF-ND /G4	5.5W	2700K	450	82 lm/W		No			0.5	40W

KT-LEDXXA19-O-8CSF-XX /G4

GENERAL PURPOSE LED LAMP


PERFORMANCE SPECIFICATIONS DETAILED

Catalog Number	Rated Lamp Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimming	CRI	Base Type	Power Factor	Legacy Equivalent Wattage
KT-LED5.5A19-O-8CSF-ND /G4	5.5W	2700K	450	82 lm/W	120V	No	>80	E26	0.5	40W
		3000K								
		3500K								
		4000K								
		5000K								
KT-LED5.5A19-O-8CSF /G4	5.5W	2700K	450	82 lm/W	120V	Yes	>80	E26	0.7	40W
		3000K								
		3500K								
		4000K								
		5000K								
KT-LED9A19-O-8CSF-ND /G4	9W	2700K	800	89 lm/W	120V	No	>80	E26	0.5	60W
		3000K								
		3500K								
		4000K								
		5000K								
KT-LED9A19-O-8CSF /G4	9W	2700K	800	89 lm/W	120V	Yes	>80	E26	0.7	60W
		3000K								
		3500K								
		4000K								
		5000K								
KT-LED12A19-O-8CSF /G4	12W	2700K	1,100	92 lm/W	120V	Yes	>80	E26	0.7	75W
		3000K								
		3500K								
		4000K								
		5000K								
KT-LED14A19-O-8CSF-ND /G4	14W	2700K	1,600	114 lm/W	120V	No	>80	E26	0.9	100W
		3000K								
		3500K								
		4000K								
		5000K								
KT-LED14A19-O-8CSF /G4	14W	2700K	1,600	114 lm/W	120V	Yes	>80	E26	0.7	100W
		3000K								
		3500K								
		4000K								
		5000K								


KT-LEDXXA19-O-8CSF-XX /G4
GENERAL PURPOSE LED LAMP

PHYSICAL SPECIFICATIONS

KT-LED5.5A19-O-8CSF-XX /G4
KT-LED9A19-O-8CSF-XX /G4

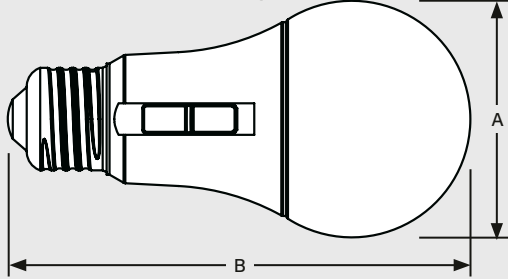

KT-LED12A19-O-8CSF-XX /G4
KT-LED14A19-O-8CSF-XX /G4

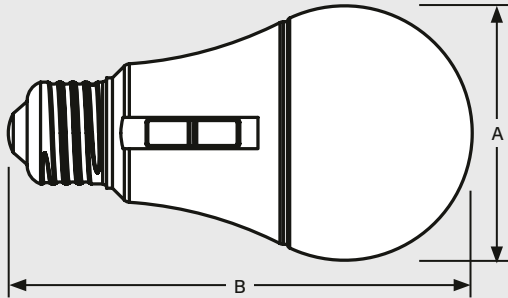

Lamp Dimensions		
Catalog Number	KT-LED5.5A19-O-8CSF-ND /G4 KT-LED5.5A19-O-8CSF /G4 KT-LED9A19-O-8CSF-ND /G4 KT-LED9A19-O-8CSF /G4	KT-LED12A19-O-8CSF /G4 KT-LED14A19-O-8CSF-ND /G4 KT-LED14A19-O-8CSF /G4
A (Diameter)	2.36"	2.56"
B (Length)	4.61"	4.65"

BASE TYPE: E26 (Medium)

Packaging Dimensions		
Catalog Number	KT-LED5.5A19-O-8CSF-ND /G4 KT-LED5.5A19-O-8CSF /G4 KT-LED9A19-O-8CSF-ND /G4 KT-LED9A19-O-8CSF /G4	KT-LED12A19-O-8CSF /G4 KT-LED14A19-O-8CSF-ND /G4 KT-LED14A19-O-8CSF /G4
Carton Quantity	50 pcs	50 pcs
Carton Dimensions	12.60" x 12.48" x 10.31"	13.58" x 13.46" x 10.31"

Packaging Weight	
Catalog Number	Carton Weight
KT-LED5.5A19-O-8CSF-ND /G4	6.72 lbs
KT-LED5.5A19-O-8CSF /G4	6.83 lbs
KT-LED9A19-O-8CSF-ND /G4	6.94 lbs
KT-LED9A19-O-8CSF /G4	6.97 lbs
KT-LED12A19-O-8CSF /G4	8.51 lbs
KT-LED14A19-O-8CSF-ND /G4	9.48 lbs
KT-LED14A19-O-8CSF /G4	9.61 lbs



ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS



KT-LEDXXA19-O-8CSF-XX /G4

GENERAL PURPOSE LED LAMP

ORDERING INFORMATION

Catalog Number	UPC	Easy Code
KT-LED5.5A19-O-8CSF-ND /G4	843654175829	MOV-19
KT-LED5.5A19-O-8CSF /G4	843654175836	ZTU-56
KT-LED9A19-O-8CSF-ND /G4	843654175850	MVI-56
KT-LED9A19-O-8CSF /G4	843654175867	ABB-52
KT-LED12A19-O-8CSF /G4	843654175898	AFT-07
KT-LED14A19-O-8CSF-ND /G4	843654175911	RYR-08
KT-LED14A19-O-8CSF /G4	843654175928	RAW-55

CATALOG NUMBER BREAKDOWN

KT-LEDXXA19-O-8CSF-XX /G4

1 2 3 4 5 6 7 8 9 10

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 Omni-Directional

- 6 80 CRI
- 7 Color Select
- 8 Color Select Designation
- 9 Dimming
- 10 Generation 4

3 Wattage

5.5	5.5W
9	9W
12	12W
14	14W

8 Color Select Designation

F	2700/3000/3500/4000/5000K
---	---------------------------

9 Dimming

ND	Non-dimmable
-	Dimmable