



BASELITE – HA– INC – SPECIFICATION SHEET




PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	X	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	HA14	41	BLC	-	41	25WLED	3K	LDM120	FR3	CG1	41

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

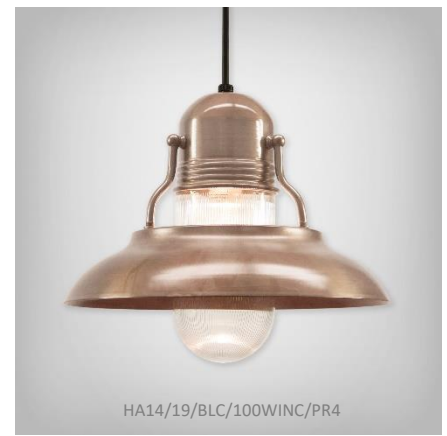

HA14/19/BLC/100WINC/PR4

A - SHADES

HA SERIES

HA14 - 200WINC (MAX), (3" GLASS), (3" GUARD)

HA16 - 200WINC (MAX), (3" GLASS), (3" GUARD)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)
(SEE WEBSITE FOR SWATCH COLORS)

20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60,
61, 62, 63, 70, 71, 72, 73

C - MOUNTING OPTIONS

* ALL FIXTURES COMES AS IS.
NO OTHER MOUNTING APPLIES

CORD MOUNT

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB,
TLW, TLB, TLW, RCB, RCW, RCHB, RCHW,
FHB, FHW, CBLC, CWHC, CHB, CHW

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX, DP24

D - MOUNTING ADD-ONS

NOT AVAILABLE

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR
OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS)

INCANDESCENT (INC)

100W, 150W, 200W

G - LED COLOR TEMP

NOT AVAILABLE

H - ELECTRICAL OPTION

NOT AVAILABLE

I - GLASS OPTIONS

3" GLASS (AVAILABLE FOR HA14 & HA16)

CL3, CLT3, BL3, RE3, GR3,
AH3, FR3, FRT3, PR3

J - ACCESSORIES

3" GUARDS (AVAILABLE FOR HA14 & HA16)

CG1, WG1

K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
OPTIONS.

NOTES

- (1). FINISH OPTIONS 40, 49, 54, 61, 62, 63, 70, 71, 72, 73 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (2). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- (3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).

*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE.


(EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).

*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.

*CORD AND CANOPY COME IN THE SAME COLOR.

*RATED FOR WET LOCATION.

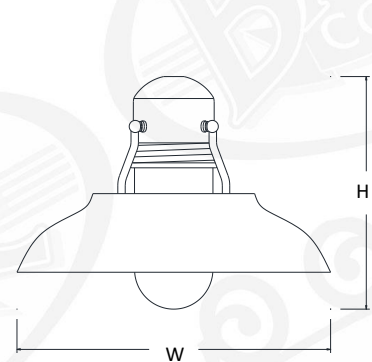

HA14 H - 11.75" W - 14"


HA16 H - 11.75" W - 16"



C - MOUNTING OPTIONS

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

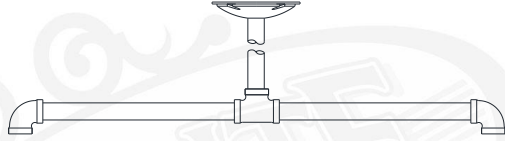

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM

(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

INCANDESCENT CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT

*CORDS RATED FOR DRY LOCATION

*CANOPY DIMENSIONS: .625" (H) 5.25" (W)

*CORD AND CANOPY COME IN THE SAME COLOR.



BLC 8' BLACK CORD

WHC 8' WHITE CORD



TCB 8' BLACK CORD, CABLE, and LOOP

TCW 8' WHITE CORD, CABLE, and LOOP



TCHB 8' BLACK CORD, 3' CHAIN, and LOOP

TCHW 8' WHITE CORD, 3' CHAIN, and LOOP



TLB 8' BLACK TELEPHONE CORD AND CABLE

TLW 8' WHITE TELEPHONE CORD AND CABLE

* Not available H.I.D.




RCB 8' BLACK CORD, CABLE, and LOOP

RCW 8' WHITE CORD, CABLE, and LOOP



RCHB 8' BLACK CORD, 3' CHAIN, and LOOP

RCHW 8' WHITE CORD, 3' CHAIN, and LOOP



FHB 8' BLACK CORD WITH FLAT HUB

FHW 8' WHITE CORD WITH FLAT HUB



CBLC 8' BLACK CORD and CABLE

CWLC 8' WHITE CORD and CABLE



CHB 8' BLACK CORD, 3' CHAIN, and LOOP

CHW 8' WHITE CORD, 3' CHAIN, and LOOP

* Loop may vary due to shade style

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26

INC 200W- HA14, HA16

*IMPORTANT - FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.

EXAMPLE: / INC150W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A
150WINC	150W	PER BULB SPECS	>90	120-277 VAC	N/A
200WINC	200W	PER BULB SPECS	>90	120-277 VAC	N/A



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.
*3" GLASS AVAILABLE FOR HA14 & HA16



CL3 3" CLEAR GLASS
CLT3 3" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS



FR3 3" FROSTED GLASS
FRT3 3" FROSTED TEMPERED




AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS


GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"




GLASS – MAX WATTAGE	
3" GLASS	100W INC / LED12W
4" GLASS	200W INC / LED25W

J – ACCESSORIES

* 3" GUARDS AVAILIABLE FOR HA14 & HA16



WG1 WIRE GUARD



CG1 CAST GUARD