



BASELITE - HPLD - PLE - PLEX - INC - SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE:	HPLD1	53	ST36	STC	53	100WINC	-	-	AH3	CG1	53	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

A - SHADES

HPLD SERIES

HPLD1 - 100WINC (MAX), (3" GLASS), (3" GUARD)

HPLD2 - 200WINC (MAX), (4" GLASS), (4" GUARD)

PLE SERIES

PLE1 - 100WINC (MAX), (3" GLASS), (3" GUARD)

PLE2 - 200WINC (MAX), (4" GLASS), (4" GUARD)

PLEX SERIES

PLEX1 - 100WINC (MAX), (3" GLASS), (3" GUARD)

PLEX2 - 200WINC (MAX), (4" GLASS), (4" GUARD)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)
(SEE WEBSITE FOR SWATCH COLORS)
20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60,
61, 62, 63, 70, 71, 72, 73

C - MOUNTING OPTIONS

* ALL FIXTURES COMES AS IS.
NO OTHER MOUNTING APPLIES
STEM MOUNT
ST6, ST12, ST18, ST24, ST36, ST48, STXX

D - MOUNTING ADD-ONS

INC ADD-ONS
SLC1/2", SLC3/4", STC1/2"

E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR
OPTIONS.

F - LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS)
INCANDESCENT (INC)
100W, 150W, 200W

G - LED COLOR TEMP

NOT AVAILABLE

H - ELECTRICAL OPTION

NOT AVAILABLE

I - GLASS OPTIONS

3" GLASS
(AVAILABLE FOR HPLD1, PLE1, PLEX1)
CL3, CLT3, BL3, RE3, GR3,
AH3, FR3, FRT3, PR3

4" GLASS
(AVAILABLE FOR HPLD2, PLE2, PLEX2)
CL4, CLT4, BL4, RE4, GR4,
AH4, FR4, FRT4, PR4

J - ACCESSORIES

3" GUARDS
(AVAILABLE FOR HPLD1, PLE1, PLEX1)
CG1, WG1
4" GUARDS
(AVAILABLE FOR HPLD2, PLE2, PLEX2)
CG2, WG2

K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
OPTIONS.

NOTES

(1). FINISH OPTIONS 40, 49, 54, 61, 62, 63, 70, 71, 72, 73 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.

(2). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.

(3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.

*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).

*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).


*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.

*RATED FOR WET LOCATION.




HPLD1/53/ST36/STC/53/100WINC/AH3/CG1/53

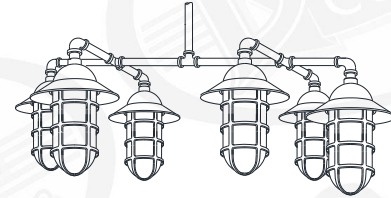


HPLD1 H - 11.375" W - 45" Proj. - 26.5"

HPLD2 H - 13.75" W - 47" Proj. - 28.5"
3" GLASS & 3" GUARD AVAILABLE FOR HPLD1
4" GLASS & 4" GUARD AVAILABLE FOR HPLD2



PLE1 H - 10.5" W - 58.5" Proj. - 37.75"

PLE2 H - 14" W - 63.25" Proj. - 42.5"
3" GLASS & 3" GUARD AVAILABLE FOR PLE1
4" GLASS & 4" GUARD AVAILABLE FOR PLE2

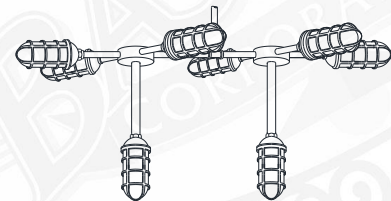

PLEX1 H - 19.5" W - 58.5" Proj. - 37.75"

PLEX2 H - 22.75" W - 63.25" Proj. - 42.5"
3" GLASS & 3" GUARD AVAILABLE FOR PLEX1
4" GLASS & 4" GUARD AVAILABLE FOR PLEX2



C - MOUNTING OPTIONS

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION




ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE – "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST


D - MOUNTING ADD-ONS

INCANDESCENT ARM ADD-ONS

* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



SLC 1/2" SLOPE CEILING CANOPY 1/2"
SLC 3/4" SLOPE CEILING CANOPY 3/4"
*(Slopes To 20 Degrees)



STC 1/2" 1/2" STEM MOUNT CANOPY

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26

INC 100W - HPLD1, PLE1, PLEX1
INC 200W - HPLD2, PLE2, PLEX2

***IMPORTANT** – FOR COMPACT FLUORESCENT (CF) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING.

EXAMPLE: / INC150W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A
150WINC	150W	PER BULB SPECS	>90	120-277 VAC	N/A
200WINC	200W	PER BULB SPECS	>90	120-277 VAC	N/A



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.
* 3" GUARDS AVAILABLE FOR HPLD1, PLE1, PLEX1 *4" GUARDS AVAILABLE FOR HPLD2, PLE2, PLEX2



CL3 3" CLEAR GLASS
CL4 4" CLEAR GLASS
CLT3 3" CLEAR TEMPERED
CLT4 4" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS
PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS
RE4 4" RED GLASS



BL3 3" BLUE GLASS
BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS
FR4 4" FROSTED GLASS
FRT3 3" FROSTED TEMPERED
FRT4 4" FROSTED TEMPERED



AH3 3" AMBER HYDE GLASS
AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS
GR4 4" GREEN GLASS

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"




GLASS – MAX WATTAGE	
3" GLASS	100W INC / LED12W
4" GLASS	200W INC / LED25W


J – ACCESSORIES

* 3" GUARDS AVAILABLE FOR HPLD1, PLE1, PLEX1


*4" GUARDS AVAILABLE FOR HPLD2, PLE2, PLEX2




WG1 3" WIRE GUARD



WG2 4" WIRE GUARD



CG1 3" CAST GUARD



CG2 4" CAST GUARD