



BASELITE – MG-RCG – INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	X	/
	A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE:	RCG12	41	E16	CB ½"	43	45W	3K	LDM120	PR3	-	44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



RCG20/74/ST18/STC/74/100INC/PR3

A - SHADES

MG SERIES

MG12 - 100WINC (MAX), (3" GLASS), (3" GUARD)

RCG SERIES

RCG12 - 100WINC (MAX), (3" GLASS), (3" GUARD)

RCG16 - 100WINC (MAX), (3" GLASS), (3" GUARD)

RCG18 - 100WINC (MAX), (3" GLASS), (3" GUARD)

RCG20 - 100WINC (MAX), (3" GLASS), (3" GUARD)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)
(SEE WEBSITE FOR SWATCH COLORS)

20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61,
62, 63, 70, 71, 72, 73

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E3, E4, B1, E16, E17

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
E10, E11, E12, E13, B15, B15S,
E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND
FABRICATE A CUSTOM ARM EXTENSION TO
MEET YOUR NEEDS).

CORD MOUNT

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB,
TLW, TLB, TLW, RCB, RCW, RCHB, RCHW,
FHB, FHW, HBLC, HWHC, CBLC, CWHC

STEM MOUNT

DP24, ST6, ST12, ST18, ST24, ST36, ST48,
STXX

D – MOUNTING ADD-ONS

INC ADD-ONS

CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2",
SLC3/4" STC1/2"

UNIVERSAL ADD-ONS

FH ½", FH ¾", LGSWL

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
INCANDESCENT (INC)
100W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

CL3, CLT3, BL3, RE3, GR3, AH3, FR3,
FRT3, PR3

J – ACCESSORIES

NOT AVAILABLE

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
OPTIONS.

NOTES

(1). FINISH OPTIONS 75, 76, 77, 83, 84, 88, 93
AND 98 ARE APPLIED BY HAND. THESE
FINISHES WILL VARY IN CONSISTENCY.

(2). FINISH OPTIONS 38, 39, 40, 49, 54, 57,
58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88,
92, 93, 98 ONLY AVAILABLE INSIDE AND OUT
OF FIXTURE. OTHER FINISHES ARE WHITE
INSIDE.

(3). FINISH OPTIONS FOR SHADES ≤ 10" IN
DIAMETER ARE THE SAME INSIDE AND OUT
OF FIXTURE. SHADES > 10" IN DIAMETER ARE
WHITE ON THE INSIDE.

(4). FINISH OPTIONS 61, 62, 70, 71, 72, 73
ARE FINISHED WITH A SUPERCHROME ON
THE INSIDE FOR ALL LED LIGHT SOURCE
OPTIONS.

(5). COLOR CORDS ARE NOT APPLICABLE FOR
LED OPTIONS.

*ALL ARMS COME WITH A CAST BACKPLATE
(CB1/2", CB3/4", LWTM, CFWTM, ECT.).


*ACCORDING TO THE LIGHT SOURCE THE
BACKPLATE MAY VARY IN SIZE. (EXAMPLE:
LED LIGHT SOURCE WILL HAVE A DEEPER
BACKPLATE TO HOUSE THE DRIVER.).

*ALL FIXTURES MOUNT TO A 4-O JUNCTION
BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.

*CORD AND CANOPY COME IN THE SAME
COLOR.

*RATED FOR WET LOCATION.

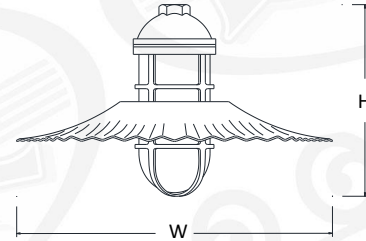


RCG12 H - 9.625" W - 12"

RCG16 H - 9.625" W - 16"

RCG18 H - 9.625" W - 18"

RCG20 H - 9.625" W - 20"



MG12 H - 10" W - 12"



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E1 8.5"(H) 18.5"(W)



E3 16"(H) 24.75"(W)



E4 14.5"(H) 22.25"(W)



B1 4"(H) 12"(W)




E16 4.75"(H) 8.5"(W)



E17 4.75"(H) 9.5"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

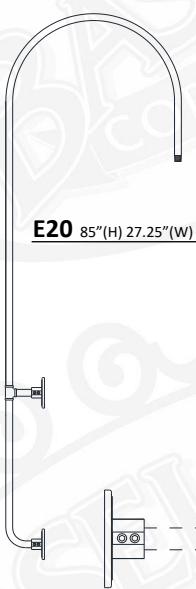

E20 85"(H) 27.25"(W)



E3A 16.375"(H) 26.25"(W)




E4A 14.5"(H) 23.75"(W)




E5 15"(H) 38.5"(W)



E6 9"(H) 23.75"(W)




E9 41.75"(H) 28.125"(W)



E12 6"(H) 39"(W)





E7 9"(H) 49.75"(W)

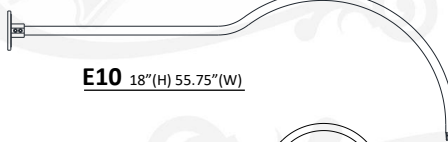


E10 18"(H) 55.75"(W)




E8 12"(H) 31.25"(W)




B15 7.5"(H) 24.5"(W)



E11 19"(H) 36.5"(W)




E25 32.625"(H) 28.5"(W)



E13 30.625"(H) 26.75"(W)




E14 TBD"(H) TBD"(W)



B15S 7.5"(H) 19.5"(W)




E21 12.5"(H) 28.5"(W)



E19 10.625"(H) 11.5"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

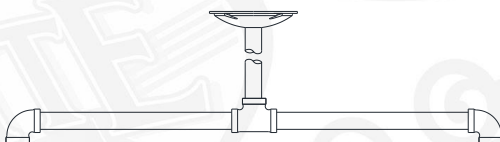

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26					
INC 100W - MG12, RCG12, RCG16, RCG18, RCG20			*IMPORTANT – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / INC100W /		
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A

I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS
CLT3 3" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS



FR3 3" FROSTED GLASS
FRT3 3" FROSTED TEMPERED



AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS

GLASS – DIMENSIONS 3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"

GLASS – MAX WATTAGE 3" GLASS – 100W INC / LED12W	
---	--

