



BASELITE – EMBLEM SHADES – INC – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL # / / / / / / / / / / /

EXAMPLE: A B C D E F G H I J K
 DS12 41 E16 CB ½" 43 25W 3K LDM120 PR3 GU-2 44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

A - SHADES

EMBLEM SHADE SERIES

M707 - 100WINC (MAX)
M710 - 150WINC (MAX)
M712 - 200WINC (MAX)
M718 - 200WINC (MAX)
M710S - 150WINC (MAX)

B - FINISH OPTIONS

(*SEE NOTES FOR LIMITATIONS*)
 (SEE WEBSITE FOR SWATCH COLORS)
 38, 40, 41, 42, 43, 44, 45, 46, 48, 49,
 50, 51, 52, 53, 54, 55, 59, 60, 61, 62,
 63, 74, 81, 87, 97

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E2, E2S, E3, E4, B1, E16,
 E17, E18A, E22, E23, E24

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15,
 E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH
 AND FABRICATE A CUSTOM ARM
 EXTENSION TO MEET YOUR NEEDS).

CORD MOUNT

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB,
 TLW, TLB, TLW, RCB, RCW, RCHB, RCHW,
 FHB, FHW, HBLC, HWHC, CBLC, CWHC

STEM MOUNT

DP24, ST6, ST12, ST18, ST24, ST36,
 ST48, STXX

D – MOUNTING ADD-ONS

INC ADD-ONS

CB1/2", CB3/4", CBC1/2", CBC3/4",
 SLC1/2", SLC3/4", STC1/2"

UNIVERSAL ADD-ONS

FH ½", FH ¾", TRB ½", TRB ¾",
 LGSWL, SMSWL

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

INCANDESCENT (INC)

100W, 150W, 200W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
 GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
 PR3, PR4

J – ACCESSORIES

GU-1, GU-2, GR7, GR10, GR12, GR18

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
 OPTIONS.

NOTES

- (1). FINISH OPTIONS 38, 40, 49, 54, 61, 62, 63 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (2). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- (3). FINISH OPTIONS 61 AND 62 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (4). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.

*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).

*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).


*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY ± 0.25.


*CORD AND CANOPY COME IN THE SAME COLOR.



M710/40/E1/ CB½"/40/150INC



M707	H - 8.5"	W - 7"
M710	H - 11.5"	W - 10"
M712	H - 12.5"	W - 12"
M718	H - 16.5"	W - 18"





M710S	H - 9.5"	W - 10"
--------------	----------	---------



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

* ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

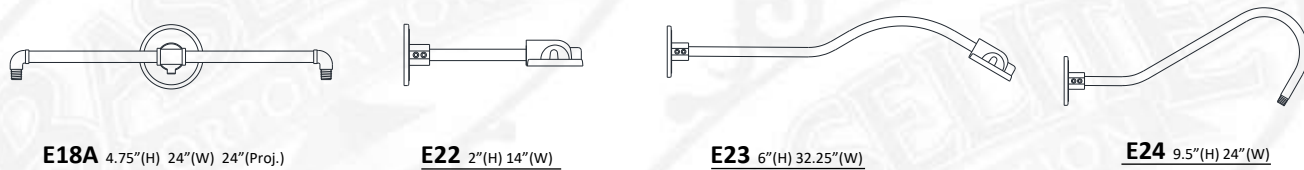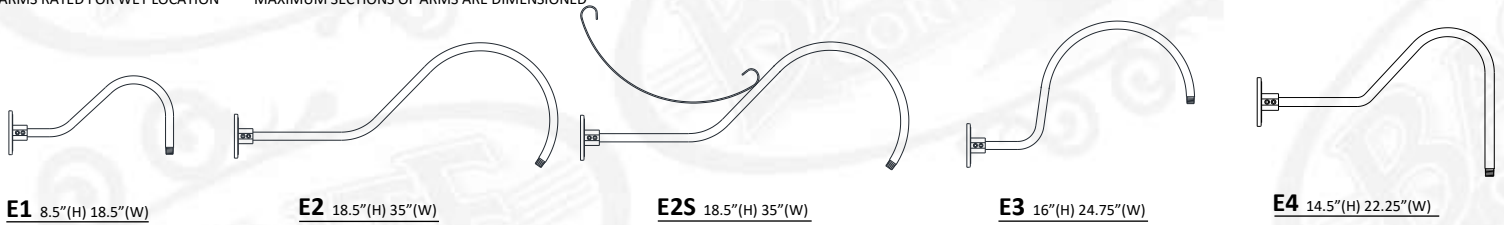

3/4" ARM EXTENSIONS

* ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

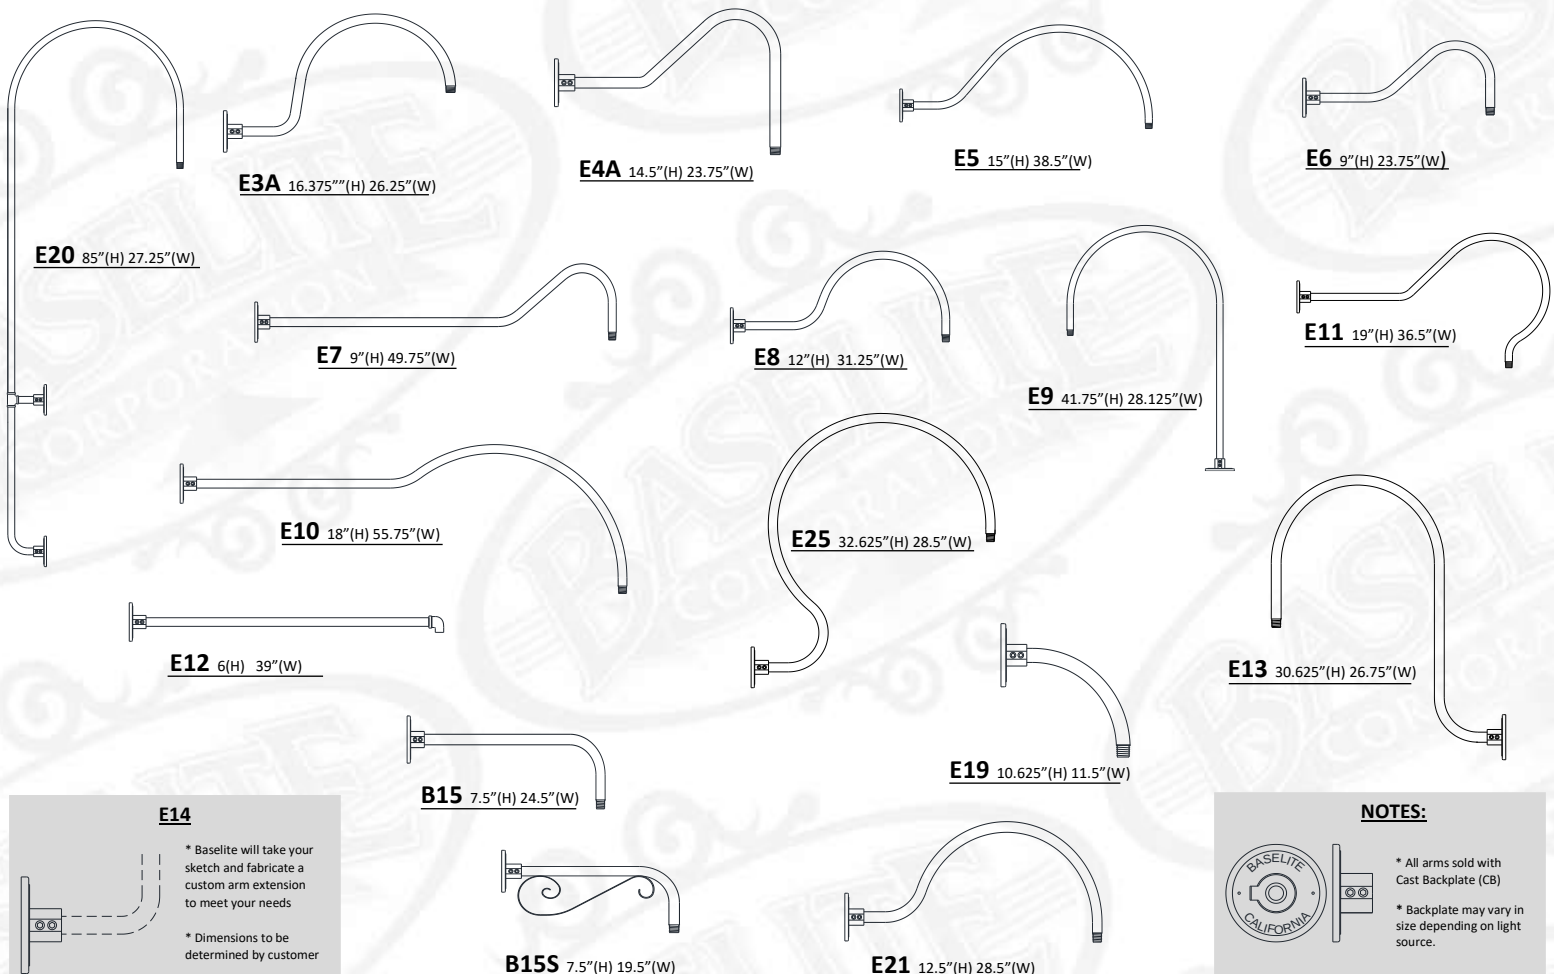

NOTES:




* All arms sold with Cast Backplate (CB)
* Backplate may vary in size depending on light source.



C - MOUNTING OPTIONS (CONTINUED)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION



DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST

INCANDESCENT CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT

*CORDS RATED FOR DRY LOCATION

*CANOPY DIMENSIONS: .625" (H) 5.25" (W)

*CORD AND CANOPY COME IN THE SAME COLOR.



BLC 8' BLACK CORD

WHC 8' WHITE CORD



TCB 8' BLACK CORD, CABLE, and LOOP

TCW 8' WHITE CORD, CABLE, and LOOP



TCHB 8' BLACK CORD, 3" CHAIN, and LOOP


TCHW 8' WHITE CORD, 3" CHAIN, and LOOP



TLB 8' BLACK TELEPHONE CORD AND CABLE

TLW 8' WHITE TELEPHONE CORD AND CABLE

* Not available H.I.D.




RCB 8' BLACK CORD, CABLE, and LOOP

RCW 8' WHITE CORD, CABLE, and LOOP



RCHB 8' BLACK CORD, 3" CHAIN, and LOOP

RCHW 8' WHITE CORD, 3" CHAIN, and LOOP



FHB 8' BLACK CORD WITH FLAT HUB

FHW 8' WHITE CORD WITH FLAT HUB



HBLC 8' BLACK CORD (H.I.D.)

HWHC 8' WHITE CORD (H.I.D.)

*(Remote ballast shades only)




CBLC 8' BLACK CORD and CABLE

CWLC 8' WHITE CORD and CABLE


D - MOUNTING ADD-ONS

INCANDESCENT ARM ADD-ONS



CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT


CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT



CBC 1/2" 1/2" BACKPLATE COVER

CBC 3/4" 3/4" BACKPLATE COVER

* Includes slip ring to hold 1/2" or 3/4" arm extension in place



SLC 1/2" SLOPE CEILING CANOPY 1/2"

SLC 3/4" SLOPE CEILING CANOPY 3/4"

*(Slopes To 20 Degrees)



STC 1/2" 1/2" STEM MOUNT CANOPY

PROJECT NAME: _____

PROJECT TYPE: _____



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS
CLT3 3" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS



FR3 3" FROSTED GLASS
FRT3 3" FROSTED TEMPERED




AH3 3" AMBER HYDE GLASS




GR3 3" GREEN GLASS

GLASS – DIMENSIONS
3" GLASS
Diameter 3.34"
Height 6.93"
Fitter 3.29"


GLASS – MAX WATTAGE
3" GLASS – 100W INC / LED12W




J – ACCESSORIES



GR07 7" WIRE GRILL
GR10 10" WIRE GRILL
GR12 12" WIRE GRILL
GR18 18" WIRE GRILL



GU-1 CAST ALUMINUM GUARD



GU-2 CAST ALUMINUM GUARD