



www.venas.com

Flat/Rm 1101D, 11/F Lippo Sun Plaza, 28 Canton Road, Tsim Sha Tsui, HongKong.


Specification

■ Page 1/8



SD-LINEAR HIGH BAY

80W/100W/160W/220W/320W

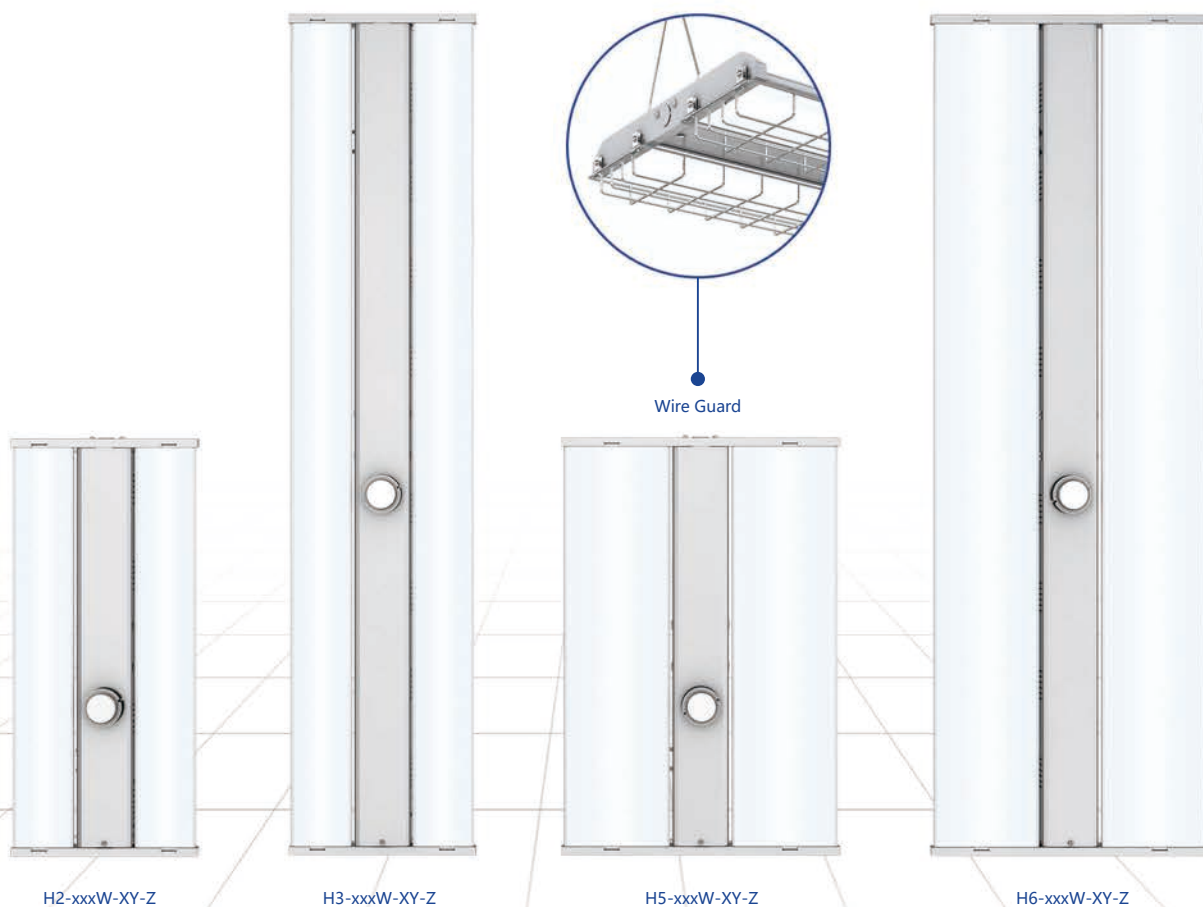

Venas Linear High Bay Series is suitable for household and commercial illumination. The dimming and power adjusting functions are available and thus it can adapt to changes in different situations, saving energy and bringing convenience to users. Its unique design makes it shine partially upward (about 14% of its light), so the forming of shadows on the ceiling can be avoided. It also has great performance in uniform light distribution.



○ Chain Mounting



○ Ceiling Mounting



FEATURES

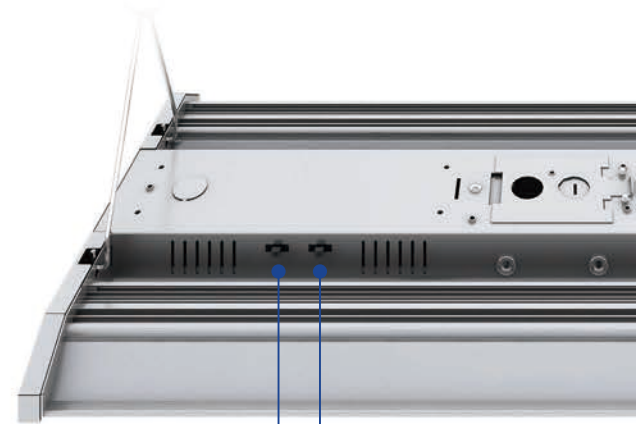
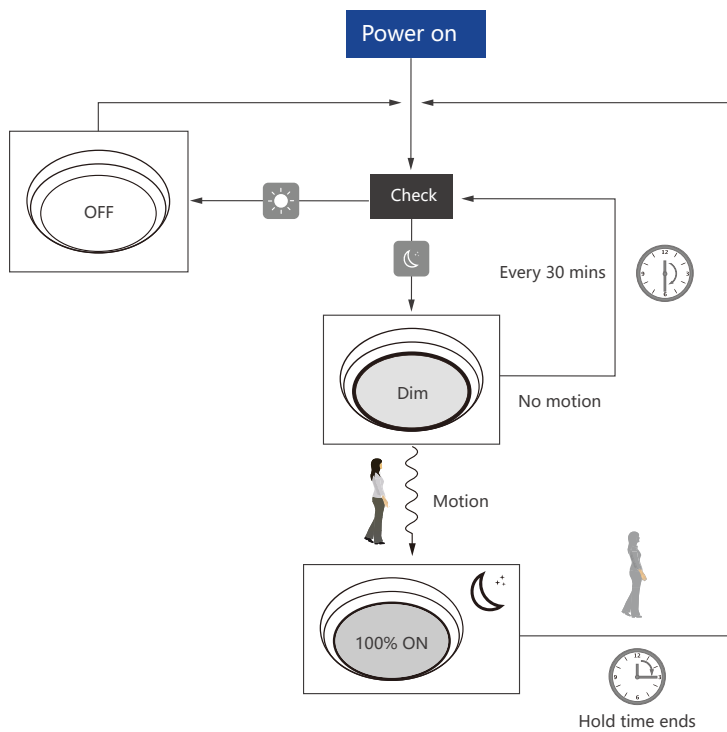


Power Switch

Power Adjustable
H2: 80W/100W/160W
H3: 100W/160W/220W
H5: 100W/160W/220W;
160W/220W/320W
H6: 160W/220W/320W


CCT Switch

CCT Tunable
4000K/4500K/5000K

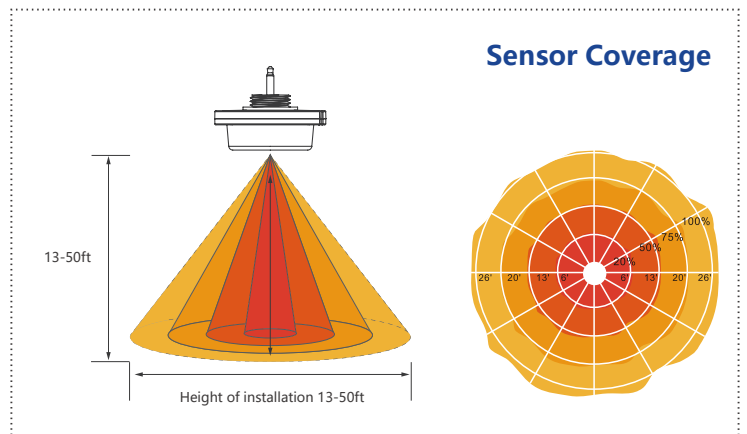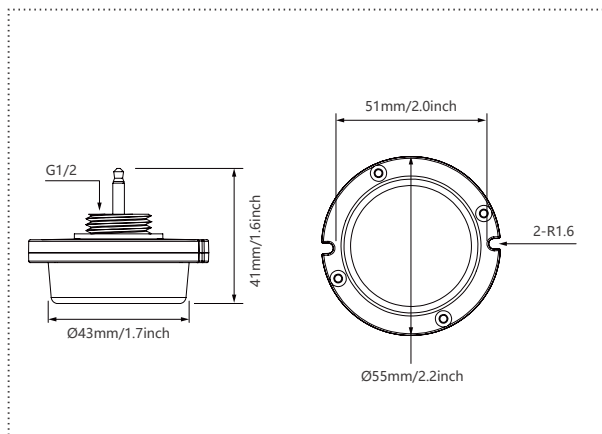


• Corridor Function


This function inside the motion sensor to achieve tri-level control, for some areas which require a light change notice before switch-off. The sensor offers 3 levels of light: 100% -> dimmed light (natural light is insufficient) -> off; and 2 periods of selectable waiting time: motion hold-time and stand-by period. Selectable daylight threshold and freedom of detection area.




With sufficient natural light, the light does not switch on when presence is detected.



With insufficient natural light, the sensor switches on the light automatically when presence is detected.





After hold-time, the light dims to stand-by level if the surrounding natural light is below the daylight threshold.




Light switches off automatically after the stand-by period elapses.

• Daylight Sensor Function


Open the daylight sensor by push  when remote control is in setting condition.




The light switches on at 100% when there is movement detected.




The light dims to stand-by level after the hold-time.



The light remains in dimming level at night.



When the natural light level exceeds the set point off to light, the light will turn off even when the space is occupied.



The light automatically turns on at 10% when natural light is insufficient (no motion).

① ↔ ③

Goes in cycle at night ...
100% on when movement detected, and dims to 10% in long absence.

Settings on this demonstration:

Hold-time: 30min

Setpoint on: 50lux

Setpoint off: 300lux


Stand-by Dim: 10%

Stand-by period: +∞


◇ when the smart photocell sensor open, the stand-by time is only +

Model NO.	H2-xxxW-XY-Z	H3-xxxW-XY-Z	H5-xxxW-XY-Z	H6-xxxW-XY-Z
Input Voltage	AC 100-277V	AC 100-277V	AC 100-277V	AC 100-277V
Wattage(Adjustable)	80W/100W/160W	80W/100W/160W	100/160/220W or 160/220/320W	160W/220W/320W
Wattage(Fixed)	80W; 100W; 160W	80W; 100W; 160W	100W; 160W; 220W; 320W	160W; 220W; 320W
Power Factor	≥0.9	≥0.9	≥0.9	≥0.9
Power Efficiency	88%	88%	88%	88%
Power Frequency	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz
Total Harmonic Distortion	<20%	<20%	<20%	<20%
LED Chip	LED2835	LED2835	LED2835	LED2835
Efficiency (± 10%)	130lm/W; 150lm/W	130lm/W; 150lm/W	130lm/W; 150lm/W	130lm/W; 150lm/W
Beam Angle	105°	105°	105°	105°
CCT(Tunable)	4000K/4500K/5000K	4000K/4500K/5000K	4000K/4500K/5000K	4000K/4500K/5000K
CCT(Fixed)	5000K	5000K	5000K	5000K
CRI	80	80	80	80
IP Rating	IP20	IP20	IP20	IP20
Operating Temperature	-25°C to +50°C (-13°F to +122°F)	-25°C to +50°C (-13°F to +122°F)	-25°C to +50°C (-13°F to +122°F)	-25°C to +50°C (-13°F to +122°F)
Lifespan	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
Warranty	5 Years	5 Years	5 Years	5 Years
Housing Material	Aluminum	Aluminum	Aluminum	Aluminum
Lens Material	Anti-UV PC Optical Material	Anti-UV PC Optical Material	Anti-UV PC Optical Material	Anti-UV PC Optical Material
Gross Weight	7.0kg(15.4lbs)	11.2kg(24.7lbs)	10.0kg(22.0lbs)	13.0kg(28.7lbs)
Product Dimension(mm/inch)	600x268x36(23.6x10.6x1.4)	1208x268x36(47.6x10.6x1.4)	600x400x36(23.6x15.7x1.4)	1208x400x36(47.6x10.6x1.4)
Packing Size(mm/inch)	680x340x120(26.8x13.4x4.7) (3 pcs per carton)	1290x340x120(50.8x13.4x4.7) (2 pcs per carton)	680x470x120(26.8x18.5x4.7) (2 pcs per carton)	1290x470x120(50.8x18.5x4.7) (2 pcs per carton)


H2-xxxW-XY-Z

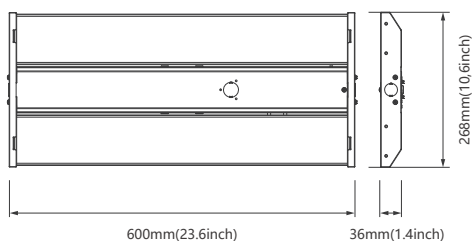


H3-xxxW-XY-Z

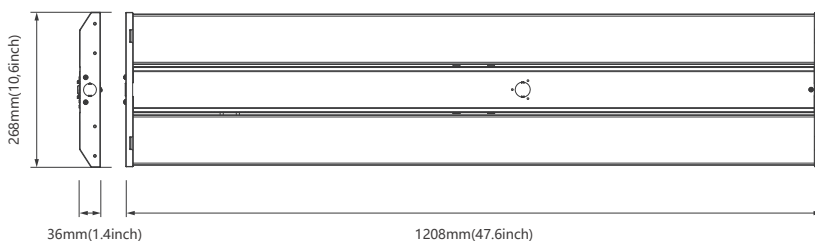

H5-xxxW-XY-Z

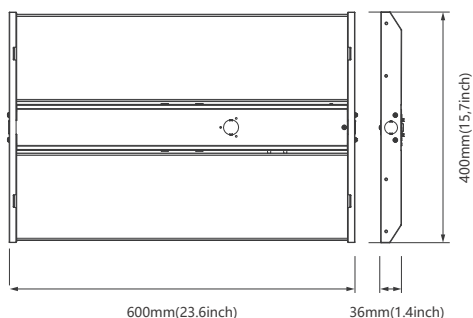


H6-xxxW-XY-Z

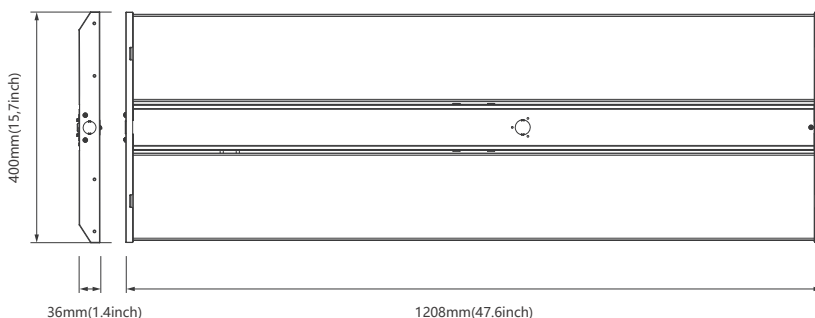


▶▶▶ ORDERING INFORMATION

H	xxxW	X	Y	Z
H Series H2/H3/H5/H6	Wattage 80W 100W 160W 220W 320W	X represents luminaire shape and size, it can be S or B.	Y represents dimming function, it can be D (with dimming), or N (without dimming).	Z represents LED CCT, it can be 35, 40, 45,50 (e.g 40=4000K)

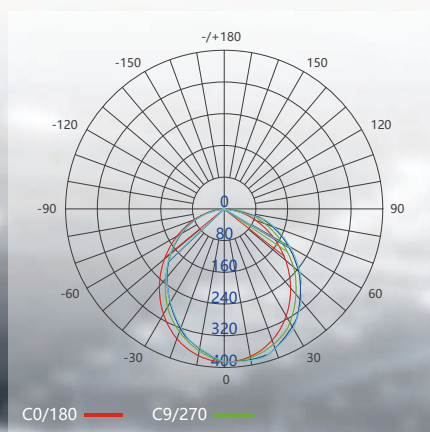


Optional(105°)

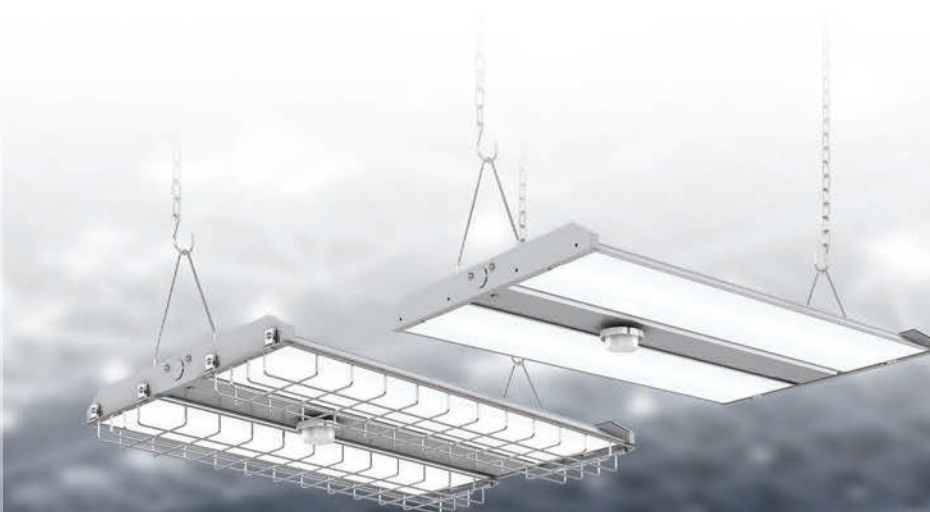

▶▶▶ APPLICATION AREAS

Supermarkets/Lobbies/Offices/Retail Stores/Schools/Restaurants/Hospitals/Kitchens

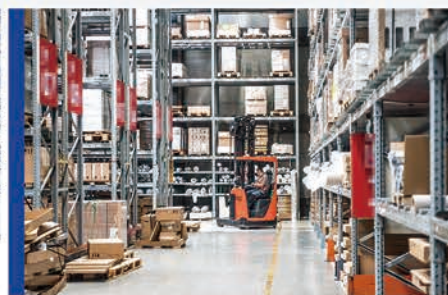

<END>

