



BASELITE - CRESCENT – INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	UDR12	41	E16	CB ¾"	43	45W	3K	PR3	GR12	44	LDM120

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

A - SHADES

CRESCENT

UDR12 - 100WINC (MAX)
UDR212 - 200WINC (MAX)
UDR16 - 100WINC (MAX))
UDR216 - 200WINC (MAX)
UDR18 - 100WINC (MAX)
UDR218 - 200WINC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
 (*SEE NOTES FOR LIMITATIONS*)
 14, 15, 16, 17, 18, 19P, 20P, 21P, 22P, 23P,
 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48,
 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61,
 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76,
 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88,
 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99,
 100, MG.

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E2, E3, E4, B1, E16, E17, E27

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).

½" WALL MOUNT

B10, B11, B101, B13, WM13, WM13R,
 WM13X

¾" WALL MOUNT

B9, B9C, B12, WM14, WM14X, WM15,
 WM18, WM35, WM35X, WM55,
 WM55X, WM60, WM60X, WM61,
 WM61X WM70, WM70X, WM71,
 WM71X

CORD MOUNT

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB, TLW,
 LTLB, TLW, RCB, RCW, RCHB, RCHW, FHB,
 FHW, CBLC, CWHC, CHB, CHW

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

INC ADD-ONS

CB ½", CB ¾", SLC ½", SLC ¾", STC,

UNIVERSAL ADD-ONS

SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾",
 SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

INCANDESCENT (INC)

100W, 150W, 200W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4,
 GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4,
 PR3, PR4

J – ACCESSORIES

GR12, GR16, GR18, UGR GU-1, GU-2, WG-1,
 WG-2

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR
 OPTIONS.

NOTES

(1). FINISH OPTIONS 75,76, 77, 83, 84, 93
 AND 98 ARE APPLIED BY HAND. THESE
 FINISHES WILL VARY IN CONSISTENCY.

(2). FINISH OPTIONS 38, 39, 40, 49, 54,
 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83,
 84, 92, 93, 98 ONLY AVAILABLE INSIDE
 AND OUT OF FIXTURE.

(3). FINISH OPTIONS 61, 62, 70, 71, 72,
 73 ARE FINISHED WITH A SUPERCHROME
 ON THE INSIDE FOR ALL LED LIGHT
 SOURCE OPTIONS.

*ALL ARMS COME WITH A CAST
 BACKPLATE (CB1/2", CB3/4", LWTM,
 CFWTM, ECT.).

*ACCORDING TO THE LIGHT SOURCE THE
 BACKPLATE MAY VARY IN SIZE.
 (EXAMPLE: LED LIGHT SOURCE WILL
 HAVE A DEEPER BACKPLATE TO HOUSE
 THE DRIVER.).


*ALL FIXTURES MOUNT TO A 4-O
 JUNCTION BOX.

*FIXTURE DIMENSIONS MAY VARY
 ± 0.25.

*CORD AND CANOPY COME IN THE SAME
 COLOR.




UDR212/74/B11/74/CL4




UDR12 H - 10.5" W - 12"

UDR212 H - 12" W - 12"



UDR16 H - 14" W - 16"

UDR216 H - 15" W - 16"

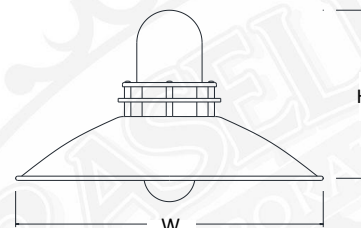

UDR18 H - 10" W - 18"

UDR218 H - 12" W - 18"











C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS

* ARMS RATED FOR WET LOCATION

* MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

















* E27 CUSTOM BACK PLATE - 8" (H) .5" (W)



3/4" ARM EXTENSIONS

* ARMS RATED FOR WET LOCATION

* MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

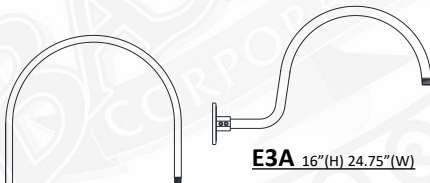

NOTES:



* All arms sold with Cast Backplate (CB)
* Backplate may vary in size depending on light source.

E14






* Baselite will take your sketch and fabricate a custom arm extension to meet your needs
* Dimensions to be determined by customer

1/2" WALL MOUNTS

* MOUNTS RATED FOR WET LOCATION






* MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



3/4" WALL MOUNTS

* MOUNTS RATED FOR WET LOCATION

* MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED





C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



WM18 30"(H) 20"(W)



WM35 26"(H) 18.25"(W)




WM35X 26"(H) 22"(W)




WM55 19"(H) 25.5"(W)



WM55X 19"(H) 27"(W)




WM60 18"(H) 20"(W)




WM60X 18"(H) 22"(W)




WM61 18"(H) 20"(W)




WM61X 18"(H) 22"(W)




WM70 18"(H) 20"(W)



WM70X 18"(H) 22"(W)




WM71 18"(H) 20"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

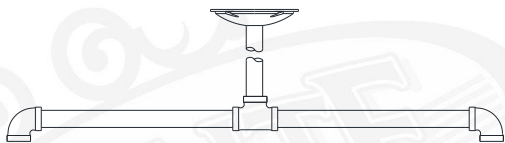

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM

(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 24"(W)

*SC24 COMES STANDARD WITH STC


INCANDESCENT CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W)
*CORD AND CANOPY COME IN THE SAME COLOR.



BLC 8' BLACK CORD

WHC 8' WHITE CORD



TCB 8' BLACK CORD, CABLE, and LOOP

TCW 8' WHITE CORD, CABLE, and LOOP



TCHB 8' BLACK CORD, 3' CHAIN, and LOOP

TCHW 8' WHITE CORD, 3' CHAIN, and LOOP



TLB 8' BLACK TELEPHONE CORD AND CABLE

TLW 8' WHITE TELEPHONE CORD AND CABLE

* Not available H.I.D.



RCB 8' BLACK CORD, CABLE, and LOOP

RCW 8' WHITE CORD, CABLE, and LOOP



RCHB 8' BLACK CORD, 3' CHAIN, and LOOP

RCHW 8' WHITE CORD, 3' CHAIN, and LOOP



FHB 8' BLACK CORD WITH FLAT HUB

FHW 8' WHITE CORD WITH FLAT HUB



CBLC 8' BLACK CORD and CABLE

CWLC 8' WHITE CORD and CABLE



CHB 8' BLACK CORD, 3' CHAIN, and LOOP

CHW 8' WHITE CORD, 3' CHAIN, and LOOP

* Loop may vary due to shade style



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS

CL4 4" CLEAR GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



PR3 3" PRISMATIC GLASS

PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS

RE4 4" RED GLASS



BL3 3" BLUE GLASS

BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS

FR4 4" FROSTED GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED



AH3 3" AMBER HYDE GLASS


AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS


GR4 4" GREEN GLASS

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"



GLASS – MAX WATTAGE	
3" GLASS	100W INC / LED12W
4" GLASS	200W INC / LED25W

J – ACCESSORIES




GR12 12" WIRE GRILL

GR16 16" WIRE GRILL


GR18 18" WIRE GRILL



UGR U- WIRE GUARD




WG-1 WIRE GUARD




WG-2 WIRE GUARD

Available for shades
12" or higher



GU-1 CAST ALUMINUM GUARD



GU-2 CAST GUARD

Available for shades
12" or higher