



BASELITE – HORIZON– INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL # / / / / / / / / / / /

EXAMPLE: HC14 A B C D E F G H I J K
41 16 CB 3/4" 43 45W 3K LDM120 PR3 GR14 44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:



HC14.58.CL4.B15.58/100INC

A - SHADES

HORIZON

HCX14 - 200WINC (MAX)

HCX16 - 200WINC (MAX)

HCX18 - 200WINC (MAX)

HC14 - 200WINC (MAX)

HC16 - 200WINC (MAX)

HC18 - 200WINC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)

(*SEE NOTES FOR LIMITATIONS*)

14, 15, 16, 17, 18, 19P, 20P, 20PB, 20SB, 21P, 22P, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

1/2" ARM EXTENSIONS

E1, E2, E3, E4, B1, E17

3/4" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

1/2" WALL MOUNT

B13, WM13R, WM13X, B10, B11, B101

3/4" WALL MOUNT

B9, B9C, B12, WM14, WM14X, WM15, WM18, WM35, WM35X, WM55, WM55X, WM60, WM60X, WM61, WM61X, WM70, WM70X, WM71, WM71X

CORD MOUNT

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB, TLW, TLB, TLW, RCB, RCW, RCHB, RCHW, FHB, FHW, HBLC, HWHC, CBLC, CWHC, CHB, CHW

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

INC ADD-ONS

CB 1/2", CB 3/4", SLG 1/2", SLG 3/4", STC

UNIVERSAL ADD-ONS

SQ 1/2", SQ 3/4", FH 1/2", FH 3/4", TRB 1/2", TRB 3/4", SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

INCANDESCENT (INC)

100W, 150W, 200W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

CL4, CLT4, BL4, RE4, GR4, AH4, FR4, FRT4, PR4

J – ACCESSORIES


GR14, GR16, GR18, GU-2, WG-2

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES


- (1). FINISH OPTIONS 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (4). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
*FIXTURE DIMENSIONS MAY VARY ± 0.25.
*CORD AND CANOPY COME IN THE SAME COLOR.



HCX14 H-12.25" W-14"

HCX16 H-12.25" W-16"

HCX18 H-15.25" W-18"



HC14 H-9" W-14"

HC16 H-9" W-16"







HC18 H-12" W-18"



C - MOUNTING OPTIONS




















1/2" ARM EXTENSIONS

* ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED







3/4" ARM EXTENSIONS

* ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

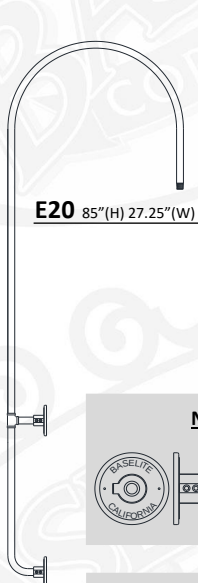

1/2" WALL MOUNTS

* MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED





C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B12 6"(H) 15.5"(W)




B9 5"(H) 18"(W)



B9C 5"(H) 18"(W)

*CHAIN HEIGHT TBD BY CUSTOMER




WM10 4.75"(H) 9.5"(W)




WM11 4.75"(H) 11"(W)




WM14 18"(H) 12"(W)




WM14X 18"(H) 14"(W)



WM15 23"(H) 19.5"(W)




WM18 30"(H) 20"(W)



WM30 15.5"(H) 16.5"(W)



WM35 26"(H) 18.25"(W)




WM35X 26"(H) 22"(W)




WM55 19"(H) 25.5"(W)



WM55X 19"(H) 27"(W)




WM60 18"(H) 20"(W)




WM60X 18"(H) 22"(W)




WM61 18"(H) 20"(W)




WM61X 18"(H) 22"(W)




WM70 18"(H) 20"(W)



WM70X 18"(H) 22"(W)




WM71 18"(H) 20"(W)



WM71X 18"(H) 22"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

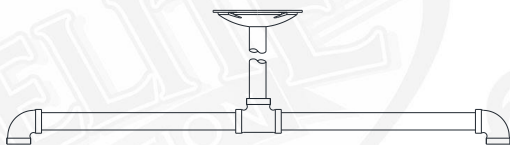

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM

(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)

*CANOPY NOT INCLUDED, ADD IN SECTION D

* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 24"(W)

*SC24 COMES STANDARD WITH STC



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL4 4" CLEAR GLASS
CLT4 4" CLEAR TEMPERED



PR4 4" PRISMATIC GLASS



RE4 4" RED GLASS



BL4 4" BLUE GLASS




FR4 4" FROSTED GLASS
FRT4 4" FROSTED TEMPERED



AH4 4" AMBER HYDE GLASS




GR4 4" GREEN GLASS




GLASS – MAX WATTAGE
4" GLASS – 200W INC / LED25W

GLASS – DIMENSIONS
4" GLASS
Diameter 4.34"
Height 8.37"
Fitter 4.29"


J – ACCESSORIES



GR14 14" WIRE GRILL
GR16 16" WIRE GRILL
GR18 18" WIRE GRILL



WG-2 WIRE GUARD
Available for shades
12" or higher



GU-2 CAST GUARD
Available for
shades 12" or
higher